

# Metal Ball Valves—Flanged, Threaded and Welding Ends

API STANDARD 608  
FOURTH EDITION, DECEMBER 2008

EFFECTIVE DATE: JUNE 2009

www.api.org



Copyright American Petroleum Institute  
Provided by IHS under license with API  
No reproduction or networking permitted without license from IHS

# Metal Ball Valves—Flanged, Threaded and Welding Ends

**Downstream Segment**

API STANDARD 608  
FOURTH EDITION, DECEMBER 2008



## Special Notes

API publications necessarily address problems of a general nature. With respect to particular circumstances, local, state, and federal laws and regulations should be reviewed.

Neither API nor any of API's employees, subcontractors, consultants, committees, or other assignees make any warranty or representation, either express or implied, with respect to the accuracy, completeness, or usefulness of the information contained herein, or assume any liability or responsibility for any use, or the results of such use, of any information or process disclosed in this publication. Neither API nor any of API's employees, subcontractors, consultants, or other assignees represent that use of this publication would not infringe upon privately owned rights.

API publications may be used by anyone desiring to do so. Every effort has been made by the Institute to assure the accuracy and reliability of the data contained in them; however, the Institute makes no representation, warranty, or guarantee in connection with this publication and hereby expressly disclaims any liability or responsibility for loss or damage resulting from its use or for the violation of any authorities having jurisdiction with which this publication may conflict.

API publications are published to facilitate the broad availability of proven, sound engineering and operating practices. These publications are not intended to obviate the need for applying sound engineering judgment regarding when and where these publications should be utilized. The formulation and publication of API publications is not intended in any way to inhibit anyone from using any other practices.

Any manufacturer marking equipment or materials in conformance with the marking requirements of an API standard is solely responsible for complying with all the applicable requirements of that standard. API does not represent, warrant, or guarantee that such products do in fact conform to the applicable API standard.

All rights reserved. No part of this work may be reproduced, translated, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from the publisher. Contact the Publisher, API Publishing Services, 1220 L Street, N.W., Washington, D.C. 20005.

*Copyright © 2008 American Petroleum Institute*

## Foreword

Nothing contained in any API publication is to be construed as granting any right, by implication or otherwise, for the manufacture, sale, or use of any method, apparatus, or product covered by letters patent. Neither should anything contained in the publication be construed as insuring anyone against liability for infringement of letters patent.

Shall: As used in a standard, “shall” denotes a minimum requirement in order to conform to the specification.

Should: As used in a standard, “should” denotes a recommendation or that which is advised but not required in order to conform to the specification.

This document was produced under API standardization procedures that ensure appropriate notification and participation in the developmental process and is designated as an API standard. Questions concerning the interpretation of the content of this publication or comments and questions concerning the procedures under which this publication was developed should be directed in writing to the Director of Standards, American Petroleum Institute, 1220 L Street, N.W., Washington, D.C. 20005. Requests for permission to reproduce or translate all or any part of the material published herein should also be addressed to the director.

Generally, API standards are reviewed and revised, reaffirmed, or withdrawn at least every five years. A one-time extension of up to two years may be added to this review cycle. Status of the publication can be ascertained from the API Standards Department, telephone (202) 682-8000. A catalog of API publications and materials is published annually by API, 1220 L Street, N.W., Washington, D.C. 20005.

Suggested revisions are invited and should be submitted to the Standards Department, API, 1220 L Street, NW, Washington, D.C. 20005, [standards@api.org](mailto:standards@api.org).



# Contents

	Page
<b>Introduction.</b> . . . . .	<b>vii</b>
<b>1 Scope</b> . . . . .	<b>1</b>
<b>2 Normative References.</b> . . . . .	<b>1</b>
<b>3 Terms and Definitions.</b> . . . . .	<b>2</b>
<b>4 Pressure-temperature Ratings.</b> . . . . .	<b>3</b>
4.1 Valve Rating. . . . .	3
4.2 Shell Rating . . . . .	3
4.3 Seat and Seal Rating. . . . .	3
<b>5 Design.</b> . . . . .	<b>4</b>
5.1 General . . . . .	4
5.2 Flow Passageway . . . . .	4
5.3 Body . . . . .	4
5.4 Anti-static Design (electrical continuity between ball-stem-body) . . . . .	5
5.5 Ball-stem Design and Construction . . . . .	6
5.6 Ball Construction. . . . .	6
5.7 Packing Glands and Gland Bolting. . . . .	6
5.8 Operation . . . . .	6
5.9 End Flange Face Interruptions. . . . .	7
5.10 Valve Shell Joints . . . . .	7
<b>6 Materials.</b> . . . . .	<b>8</b>
6.1 Shell . . . . .	8
6.2 Trim. . . . .	8
6.3 Bolting. . . . .	8
6.4 Stem Seals, Body Seals and Gaskets. . . . .	8
6.5 Identification Plate(s) . . . . .	9
6.6 Threaded Plugs . . . . .	9
<b>7 Inspection, Examination and Testing</b> . . . . .	<b>9</b>
7.1 Inspection and Examination. . . . .	9
7.2 Assembly . . . . .	9
7.3 Pressure Testing . . . . .	9
<b>8 Marking.</b> . . . . .	<b>9</b>
<b>9 Packaging and Shipping Requirements.</b> . . . . .	<b>10</b>
<b>10 Fire Testing.</b> . . . . .	<b>10</b>
<b>11 Spare Parts.</b> . . . . .	<b>11</b>
<b>Annex A (informative) Information to be Specified by Purchaser</b> . . . . .	<b>12</b>
<b>Annex B (informative) Figures</b> . . . . .	<b>13</b>
<b>Figures</b>	
1 Flange Face Interruption Limits. . . . .	8
2 Typical Unidirectional Valve Identification Plate Symbol. . . . .	10
B.1 Typical Floating Ball Valve Components (One-piece Body Illustrated)—Nomenclature . . . . .	13
B.2 Typical Trunnion-mounted Ball Valve Components (Split-body Valve Illustrated)—Nomenclature . . . . .	14

Contents

	Page
Tables	
1     Minimum Seat Pressure-temperature Rating—PSIG .....	3
2     Minimum Seat Pressure-temperature Rating—BAR. ....	4
3     Cylinder Diameter for Categorizing Bore Size. ....	5

Copyright American Petroleum Institute  
Provided by IHS under license with API  
No reproduction or networking permitted without license from IHS



## Introduction

The purpose of this API standard is to establish additional design, operational and performance requirements required by petroleum refining, petrochemical processing and chemical processing end users that are in addition to and beyond the requirements established by ASME B16.34, *Valves-Flanged, Threaded and Welding End* .

API 608 is intended to provide the similar additional requirements for steel and alloy steel ball valves beyond ASME B16.34 as do the following API standards for other valve types:

API Standard 594, *Check Valves: Flanged, Lug, Wafer and Butt-welding*

API Standard 599, *Metal Plug Valves—Flanged, Threaded and Welding Ends*

API Standard 600, *Bolted Bonnet Steel Gate Valves for Petroleum and Natural Gas Industries*

API Standard 602, *Steel Gate, Globe and Check Valves for Sizes DN 100 and Smaller for the Petroleum and Natural Gas Industries*

API Standard 603, *Corrosion-resistant, Bolted Bonnet Gate Valves—Flanged and Butt-welding Ends*

API Standard 609, *Butterfly Valves: Double Flanged, Lug and Wafer-type*



# Metal Ball Valves—Flanged, Threaded and Welding Ends

## 1 Scope

**1.1** This standard specifies the requirements for metal ball valves suitable for petroleum, petrochemical and industrial applications that have:

- flanged ends in sizes NPS  $\frac{1}{2}$  through NPS 20 (DN 15 through DN500);
- butt-welding ends in sizes NPS  $\frac{1}{2}$  through NPS 20 (DN 15 through DN 500);
- socket-welding ends in sizes NPS  $\frac{1}{4}$  through NPS 2 (DN 8 through DN 50);
- threaded ends in sizes NPS  $\frac{1}{4}$  through NPS 2 (DN 8 through DN 50).

Corresponding to the nominal pipe sizes in ASME B36.10M.

**1.2** This standard applies to metal ball valves with pressure classes as follows:

- flanged ends in Classes 150, 300 and 600 (PN 16, 25, 40 and 100);
- butt-welding ends in Classes 150, 300 and 600 (PN 16, 25, 40 and 100);
- socket-welding ends in Classes 150, 300, 600 and 800 (PN 16, 25, 40 and 100);
- threaded ends in Classes 150, 300, 600 and 800 (PN 16, 25, 40 and 100).

**1.3** This standard establishes requirements for bore sizes described as:

- full bore;
- single reduced bore;
- double reduced bore.

**1.4** This standard applies to floating ball valve designs (Figure B.1) and trunnion ball valve designs (Figure B.2). These figures are to be used only for the purpose of establishing standard nomenclature for valve components—other floating and trunnion designs also exist.

**1.5** This standard establishes additional requirements for ball valves that are otherwise in full conformance to the requirements of ASME B16.34, Standard Class.

## 2 Normative References

The following referenced documents form a part of this standard. If references are dated, only that revision applies; for undated references, the most current edition or revision applies.

API Standard 598, *Valve Inspection and Testing*

API Standard 607, *Testing of Valves—Fire-type Testing Requirements*

ASME B1.1 <sup>1</sup>, *Unified Inch Screw Threads*

<sup>1</sup> ASME International, 3 Park Avenue, New York, New York 10016, [www.asme.org](http://www.asme.org)

ASME B1.20.1, *Pipe Threads, General Purpose (Inch)*

ASME B16.5, *Pipe Flanges and Flanged Fittings NPS 1/2 Through 24 Metric/Inch Standard*

ASME B16.10, *Face-to-Face and End-to-End Dimensions*

ASME B16.11, *Forged Fittings, Socket-welding and Threaded*

ASME B16.20, *Metallic Gaskets for Pipe Flanges—Ring-joint, Spiral-wound and Jacketed*

ASME B16.25, *Butt Welding Ends*

ASME B16.34, *Valves—Flanged, Threaded and Welding End*

ASME B18.2.2, *Square and Hex Nuts (Inch Series)*

ASME B31.3, *Process Piping*

ASME B36.10M, *Welded and Seamless Wrought Steel Pipe*

MSS SP-45<sup>2</sup>, *Bypass and Drain Connections*

## **3 Terms and Definitions**

### **3.1**

#### **Class**

An alphanumeric designation that is used for reference purposes relating to valve pressure/temperature capability, taking into account valve material mechanical properties and valve dimensional characteristics. It comprises the letters Class followed by a dimensionless whole number. The number following the letters Class do not represent a measurable value and are not used for calculation purposes except where specified in this Standard. The allowable pressure for a valve having a Class number depends on the valve material and its application temperature and is to be found in tables of pressure/temperature ratings. Class usage is applicable to steel valves bearing NPS nominal size designations.

### **3.2**

#### **NPS**

An alpha numeric designation of size that is common for components used in a piping system, used for reference purposes, comprising the letters NPS followed by a dimensionless number indirectly related to the physical size of the bore or outside diameter of the end connection as appropriate. The dimensionless number may be used as a valve size identifier without the prefix NPS. The dimensionless size identification number does not represent a measurable value and is not used for calculation purposes. Prefix NPS usage is applicable to steel flanges bearing Class designations.

### **3.3**

#### **DN**

An alpha numeric designation of size that is common for components used in a piping system, used for reference purposes, comprising the letters DN followed by a dimensionless number indirectly related to the physical size of the bore or outside diameter of the end connection as appropriate. The dimensionless number following DN does not represent a measurable value and is not used for calculation purposes except where specified in this international standard. DN usage is applicable to steel valves bearing PN designations.

---

<sup>2</sup> Manufactures Standardization Society, 127 Park Street NE, Vienna, Virginia 22180, [www.mss-hq.com](http://www.mss-hq.com)

### 3.4

#### PN

An alphanumeric designation that is used for reference purposes relating to valve pressure/temperature capability, taking into account valve material mechanical properties and valve dimensional characteristics. It comprises the letters PN followed by a dimensionless whole number. The number following the letters PN do not represent a measurable value and are not used for calculation purposes except where specified in this international standard. The allowable pressure for a valve having a PN number depends on the valve material and its application temperature and is to be found in tables of pressure/temperature ratings. PN usage is applicable to steel valves bearing DN nominal size designations

## 4 Pressure-temperature Ratings

### 4.1 Valve Rating

The valve pressure-temperature rating shall be the lesser of the shell rating or the seat rating.

### 4.2 Shell Rating

The valve shell pressure-temperature rating shall be the rating for the shell material as listed for Standard Class in ASME B16.34 (see 6.1 for definition of shell and description of shell materials).

### 4.3 Seat and Seal Rating

#### 4.3.1 Seat Ratings for PTFE and R-PTFE

Valves employing PTFE (polytetrafluoroethylene) or Modified PTFE seats and valves employing R-PTFE (reinforced polytetrafluoroethylene) or modified R-PTFE seats shall have pressure-temperature ratings equal or higher than the values shown in Table 1 and Table 2.

#### 4.3.2 Seat Ratings—Other Materials

Seat pressure-temperature ratings for seat materials other than PTFE or R-PTFE shall be the manufacturer's standard; however, the published seat pressure-temperature shall not exceed the published shell rating.

**Table 1—Minimum Seat Pressure-temperature Rating—PSIG**

Temperature °F	Temperature °C	PTFE <sup>a</sup> and Modified PTFE Seats			Trunnion	R-PTFE <sup>a</sup> and Modified R-PTFE seats			Trunnion
		Floating Ball Design				Floating Ball Design			
		NPS≤2	2<NPS≤6	NPS>6		NPS>2	NPS≤2	2<NPS≤6	
−20 to 100 <sup>b</sup>	−29 to 38	1000	740	285	740	1100	740	285	740
150	66	825	610	235	610	925	625	240	625
200	93	660	485	190	485	760	515	200	515
250	122	500	355	140	355	575	400	155	400
300	149	325	230	90	230	420	275	110	275
350	177	170	100	40	100	250	125	50	125
400	205	—	—	—	—	80	50	20	50

NOTE For any given pressure class, the seat pressure-temperature rating shall not exceed the shell ratings in ASME B16.34.

<sup>a</sup> Polytetrafluoroethylene.

<sup>b</sup> Consult manufacturer for minimum design temperature rating of seats.



**Table 2—Minimum Seat Pressure-temperature Rating—BAR**

Temperature °F	Temperature °C	PTFE <sup>a</sup> and Modified PTFE Seats			Trunnion	R-PTFE <sup>a</sup> and Modified R-PTFE seats			Trunnion
		Floating Ball Design				Floating Ball Design			
		DN≤50	50<DN≤150	DN>150		DN≤50	50<DN≤150	DN>150	
−20 to 100 <sup>b</sup>	−29 to 38	69.0	51.0	19.7	51.0	75.9	51.0	19.7	51.0
150	66	56.9	42.1	16.2	42.1	63.8	43.1	16.6	43.1
200	93	45.5	33.4	13.1	33.4	52.4	35.5	13.8	35.5
250	122	34.5	24.5	9.7	24.5	39.7	27.6	10.7	27.6
300	149	22.4	15.9	6.2	15.9	29.0	19.0	7.6	19.0
350	177	11.7	6.9	2.8	6.9	17.2	8.6	3.5	8.6
400	205	—	—	—	—	5.5	3.4	1.4	3.4
NOTE For any given pressure class, the seat pressure-temperature rating shall not exceed the shell ratings in ASME B16.34.									
<sup>a</sup> Polytetrafluoroethylene.									
<sup>b</sup> Consult manufacturer for minimum design temperature rating of seats.									

## 5 Design

### 5.1 General

Valves designed and manufactured in accordance with this standard shall meet the requirements of Standard Class valves per ASME B16.34 and additional requirements as specified in this standard.

### 5.2 Flow Passageway

The flow passageway includes the circular opening in the ball and the body runs leading thereto from the valve end connections, which can be flanged, threaded, socket-welding or butt-welding types. The bore of this flow passageway is categorized in this standard as: full bore; single reduced bore; and double reduced bore. Full bore, single reduced bore and double reduced bore valves shall have a flow passageway through which a cylinder with the diameters shown in Table 3 can be passed when the handle or gear operator is moved to the full open position stop.

### 5.3 Body

**5.3.1** The wall thicknesses of the valve body (see note) shall be in accordance with the requirements of ASME B16.34 for the applicable Standard Class. ASME wall thicknesses based on the Standard Class of valve and not the P/T ratings of 4.1.

NOTE Body may be comprised of multiple components, such as: body, tailpiece, etc.

**5.3.2** Face-to-face dimensions of flanged valves and end-to-end dimensions of butt-welding end valves shall conform to ASME B16.10 ball valves—long or short pattern.

**5.3.3** End-to-end dimensions for threaded and socket-welding end valves shall be per the manufacturer's standard.

**5.3.4** The dimensions and facing finish of end flanges shall conform to ASME B16.5.

**5.3.5** Butt-welding ends shall conform to the requirements of ASME B16.25 with an inside diameter (denoted as  $B$  in ASME B16.25) tolerance per ASME B16.34.

**5.3.6** Socket-welding ends shall conform to the requirements of ASME B16.11, except minimum wall thicknesses shall conform to Table 4 of ASME B16.34.

**Table 3—Cylinder Diameter for Categorizing Bore Size**

NPS	Full bore		Single reduced bore		Double reduced bore		DN
	in.	mm	in.	mm	in.	mm	
1/4	0.20	5.1	n/a	n/a	n/a	n/a	8
3/8	0.32	8.1	0.20	5.1	n/a	n/a	10
1/2	0.44	11.2	0.31	7.9	n/a	n/a	15
3/4	0.69	17.5	0.47	11.9	0.31	7.9	20
1	0.94	23.9	0.69	17.5	0.56	14.2	25
1 1/4	1.19	30.2	0.88	22.4	0.71	18.0	32
1 1/2	1.44	36.6	1.06	26.9	0.91	23.1	40
2	1.94	49.3	1.44	36.6	1.19	30.2	50
2 1/2	2.44	62.0	1.94	49.3	1.44	36.6	65
3	2.94	74.7	2.19	55.6	1.94	49.3	80
4	3.94	100.1	2.94	74.7	2.44	70.0	100
6	5.94	150.9	3.94	100.1	2.94	74.7	150
8	7.94	201.7	5.94	150.9	3.94	100.1	200
10	9.88	251.0	7.94	201.7	5.94	150.9	250
12	11.88	301.8	9.88	251.0	7.94	201.7	300
14	13.14	333.8	11.88	301.8	9.88	251.0	350
16	15.15	384.8	13.14	333.8	11.88	301.8	400
18	17.16	435.9	15.15	384.8	13.14	333.8	450
20	19.17	486.9	17.16	435.9	15.15	384.8	500

**5.3.7** Threaded ends shall have taper pipe threads in accordance with ASME B1.20.1 and the minimum wall thicknesses shall conform to Table 4 of ASME B16.34.

**5.3.8** End flanges and bonnet flanges shall be cast or forged integral with the body; except that cast or forged flanges attached by full penetration butt-welding may be used if agreed to by the purchaser. Valves having flanges attached by welding shall meet the requirements of Paragraph 2.1.6 of ASME B16.34.

**5.3.9** Upstream sealing, trunnion mounted ball valves shall have a test port into the body cavity between seats to allow seat testing as specified in API 598. This test port shall have taper pipe threads in accordance with ASME B.1.20.1 and shall be fitted with a solid test plug conforming to ASME B16.11. Additional tapped openings are permitted only when specified in the purchase order, and shall have taper pipe threads in accordance with ASME B.1.20.1.

**5.3.10** If drain, bypass or other types of auxiliary connections are specified in the purchase order, they shall comply with the requirements of ASME B16.34.

## **5.4 Anti-static Design (electrical continuity between ball-stem-body)**

Valves shall incorporate an antistatic feature that insures electrical continuity between the stem and body of valves  $\leq$  NPS 2 ( $\leq$  DN 50) and between ball, stem and body of valves  $>$  NPS 2 ( $>$  DN 50). The anti-static feature shall have electrical continuity across the discharge path with a resistance not exceeding 10 ohms from a power source not exceeding 12VDC when type tested on a new, dry, as-built valve after open-close position cycling of the valve at least 5 times.

## 5.5 Ball-stem Design and Construction

**5.5.1** The valve shall be designed to insure that if a failure occurs at the stem-to-ball connection or of the stem itself within the pressure boundary, no portion of the stem is ejected by internal pressure.

**5.5.2** The torsional strength of both the stem-to-ball connection and the portion of the stem within the pressure boundary (below top of packing) shall exceed the torsional strength of the stem portion above the pressure boundary (above the top of the packing) by at least 10 %.

**5.5.3** The stem and the ball-to-stem connection shall be designed such that no permanent deformation occurs and no failure of any part occurs when a force applied to the lever or gear operator handwheel produces a torque equal to the greater of:

- 15 ft-lbs (20 N-m), or
- twice the manufacturer's maximum published torque.

The manufacturer's maximum published torque shall be based upon clean, dry air service at the maximum differential pressure rating of the valve.

## 5.6 Ball Construction

Ball shall have a cylindrical bore and shall be of solid, one-piece construction. Other constructions, such as "hollow"-type, cored cavity, or sealed cavity may be furnished only if agreed to by the purchaser.

## 5.7 Packing Glands and Gland Bolting

**5.7.1** Adjustable packing glands shall be accessible for re-sealing stem packing without the disassembly of valve parts or operator parts.

**5.7.2** Packing glands that are threaded into bodies or covers or onto stems shall not be used for valve sizes greater than NPS 3 (DN 80) unless otherwise specified by purchaser. (See Figure 1 and Figure 2 for parts identification.)

**5.7.3** Vertically split glands shall not be used.

**5.7.4** When used, gland bolts shall pass through holes in the packing gland. The use of open slots is not permitted on any portion of the packing gland.

**5.7.5** Packing gland bolts shall be designed so that the bolt stress shall not exceed  $\frac{1}{3}$  of the ultimate tensile strength of the bolting material when compressing packing material to a compressive stress of 5500 PSI (38 Mpa) at 100 °F (38 °C).

## 5.8 Operation

**5.8.1** Unless otherwise specified on the purchase order, manually operated valves shall be equipped with lever-type handles.

**5.8.2** Gear operators shall be fitted with handwheels and shall be sized to comply with the requirements of 5.8.3

**5.8.3** Unless otherwise specified by the purchaser, the length of the lever handle or the gear ratio, efficiency and handwheel diameter of gear operators shall be designed so that the required input force to fully open and close valve shall not exceed 80 lb (360 N) when operating valve at manufacturer's maximum published torque as described in 5.5.3.



- 5.8.4** Valves shall be closed by rotating the closure device (lever or handwheel) in a clockwise direction.
- 5.8.5** Position stops shall be provided for both fully open and fully closed positions of valve.
- 5.8.6** Handwheels on manual gear operators shall be marked to indicate the direction of opening and/or closing.
- 5.8.7** Lever type handles shall be parallel to the ball bore, so that lever always indicates ball bore position. If the purchaser specifies round or oval direct-mounted handwheels, a permanent means of indicating ball bore position shall be included in handwheel design.
- 5.8.8** An indication of the position of ball bore of the valve shall be integral with the valve stem. This indication may be by permanent marking to the top of the stem, or by shape of exposed stem portion.
- 5.8.9** Levers, handwheels and other operating mechanisms shall be fitted so that they may be removed and replaced without affecting the integrity of the stem seal(s), body seal(s) or stem retention means.
- 5.8.10** Lever or manual gear operators shall be designed so that the lever or gear operator cannot be assembled to the valve other than in the correct configuration to indicate open and closed positions.
- 5.8.11** When specified in the purchase order, valves shall be furnished with a lockable device that accepts a purchaser-supplied padlock that allows the valve to be locked in both the fully open and fully closed positions. The lockable device shall be designed such that a lock with a  $\frac{5}{16}$ -in. (8-mm) diameter shank, not more than 4.0 in. (102 mm) long can be inserted directly through hole(s) in lockable device and locked. Provision for lockable device is permitted, even when not specified on purchase order.
- 5.8.12** Position stops integral with packing gland, gland flange or gland bolting shall not be used.

## **5.9 End Flange Face Interruptions**

**5.9.1** Ring shaped radial gaps in the faces of end flanges of flanged ball valves, located in the sealing surface of a centered ASME B16.20 spiral-wound gasket, shall not exceed 0.030 in. (0.75 mm); see dimension b on Figure 1. An example of this condition is the radial gap that exists between the outer diameter of a body insert and the inner bore of the body end flange of a valve as shown in Figure B.1.


**5.9.2** For ball valves designed with a body insert as shown in Figure B.1, with a gasket seating face outer diameter located within the sealing area of a centered ASME B16.20 spiral-wound gasket, the body insert flange face shall not protrude beyond the valve body end flange face. The body insert flange face shall not be recessed below the body end flange face by more than 0.010 in. (0.25 mm). See dimension a on Figure 1.

## **5.10 Valve Shell Joints**

**5.10.1** Nut and bolt head bearing surfaces of shell parts assembled by bolting shall be perpendicular to the centerline of tapped or clearance holes for the fasteners within  $\pm 1.0$  degree.

**5.10.2** Bolting used for assembly of shell joints shall be studs with nuts or cap screws. Nuts shall be semi-finished hexagons conforming to ASME B18.2.2. Bolts and studs shall be threaded in conformance to ASME B1.1 unless purchaser specifies metric series bolting. Bolting 1 in. (25.4 mm) or smaller shall have coarse (UNC) threads; bolting larger than 1 in. (25.4 mm) shall be 8 thread series (8UN). Bolt and stud threads shall be Class 2A, and nut threads shall be Class 2B per ASME B1.1.

**5.10.3** Each bolted or threaded shell joint calculation shall be in accordance with the requirements of ASME B16.34, Section 6.4.

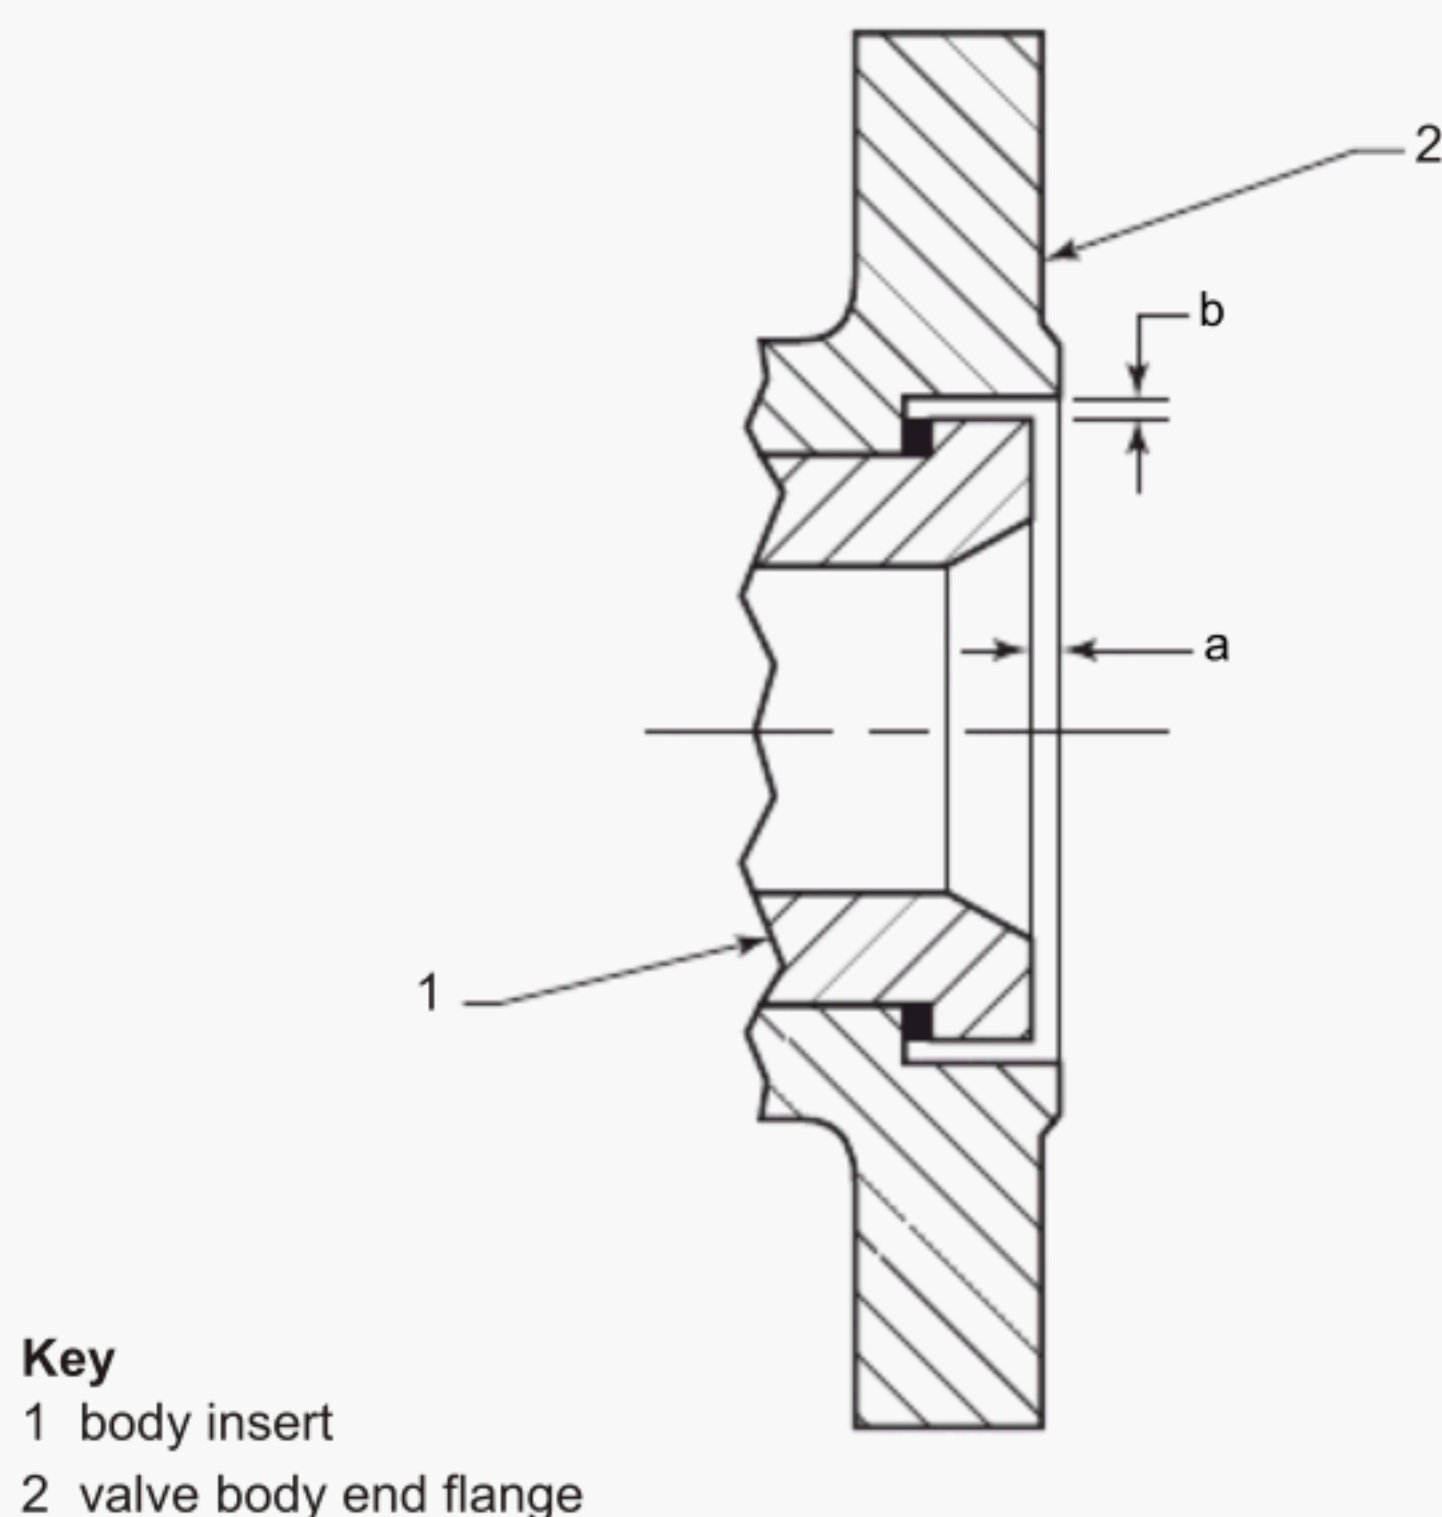

**Figure 1—Flange Face Interruption Limits**

## 6 Materials

### 6.1 Shell

The shell, which comprises the body, body cover, body insert, body cap, and trunnion cap, shall be of materials specified in ASME B16.34. See Figure B.1 and Figure B.2.

### 6.2 Trim

The internal metal parts of the valve, including: ball; stem; metal seats; and seat retainers shall be of the same nominal chemical composition as the shell and have mechanical and corrosion-resistance properties equivalent to, or better than those of the shell. Purchaser may specify trim materials with greater corrosion resistance or higher strength than the shell. See Figure B.1 and Figure B.2.

### 6.3 Bolting

Unless an alternate bolting material is specified by the purchaser, body, cover, shell joint and packing gland bolting shall be intermediate strength as specified in ASME B16.5 as a minimum. Purchaser may specify higher grades of bolting materials.

### 6.4 Stem Seals, Body Seals and Gaskets

Materials for stem seals, body seals and gaskets shall be suitable for use at the maximum operating temperature and corresponding maximum pressure rating of the valve as stated by the valve manufacturer. Metallic parts of any gasket shall have corrosion resisting properties equal to or superior to shell material.



## 6.5 Identification Plate(s)

The material of identification plate(s) shall be austenitic stainless steel or nickel alloy. The identification plate(s) shall be attached to the valve body by welding or by pins made from same materials allowed for identification plate.

## 6.6 Threaded Plugs

Threaded plugs used for sealing tapped openings (see 5.3.9) shall have the same nominal composition as the shell material. Plugs manufactured from any type of cast iron shall not be used.

# 7 Inspection, Examination and Testing

## 7.1 Inspection and Examination

**7.1.1** Each valve shall be visually examined by the manufacturer in accordance with API 598.

**7.1.2** When purchaser specifies that the purchaser witness tests and examinations at the valve manufacturer's factory, inspection and examination shall be in accordance with API 598.

## 7.2 Assembly

**7.2.1** Light oil or anti-seize compound may be applied to facilitate assembly of mating metal components.

**7.2.2** Light oil, having a viscosity no greater than kerosene, may be used to assemble o-rings or other seals required to move during valve assembly.

**7.2.3** No sealant or grease may be applied to the ball-seat interface prior to testing.

## 7.3 Pressure Testing

Each valve shall be tested in accordance with API 598.

# 8 Marking

**8.1** Identification plate shall be marked in accordance with ASME B16.34, and shall also be marked "API 608."

**8.2** Body end flanges require marking when end flanges are ring type joint design. The ring joint groove number (such as R24) shall be marked on each end flange outside diameter. Ring joint groove numbers are as shown in ASME B16.5.

**8.3** The following indicate special marking for unidirectional valves.

**8.3.1** Valves designed for, or modified to have sealing capability in only one direction or orientation shall be marked to identify the unidirectional seat. Markings shall be applied to the body of the valve at the appropriate end, or on an identification plate (see 6.5).

**8.3.2** Markings on body shall consist of letters or symbols cast, stamped or otherwise integral with the valve, or marked on an identification plate (see 6.5) or both. When stamping is used on valve body, low stress stamping process shall be used.

**8.3.3** Typical markings include arrows to indicate preferred sealing direction, or "high pressure side" marked at the appropriate end connection or on the identification plate, see Figure 2.

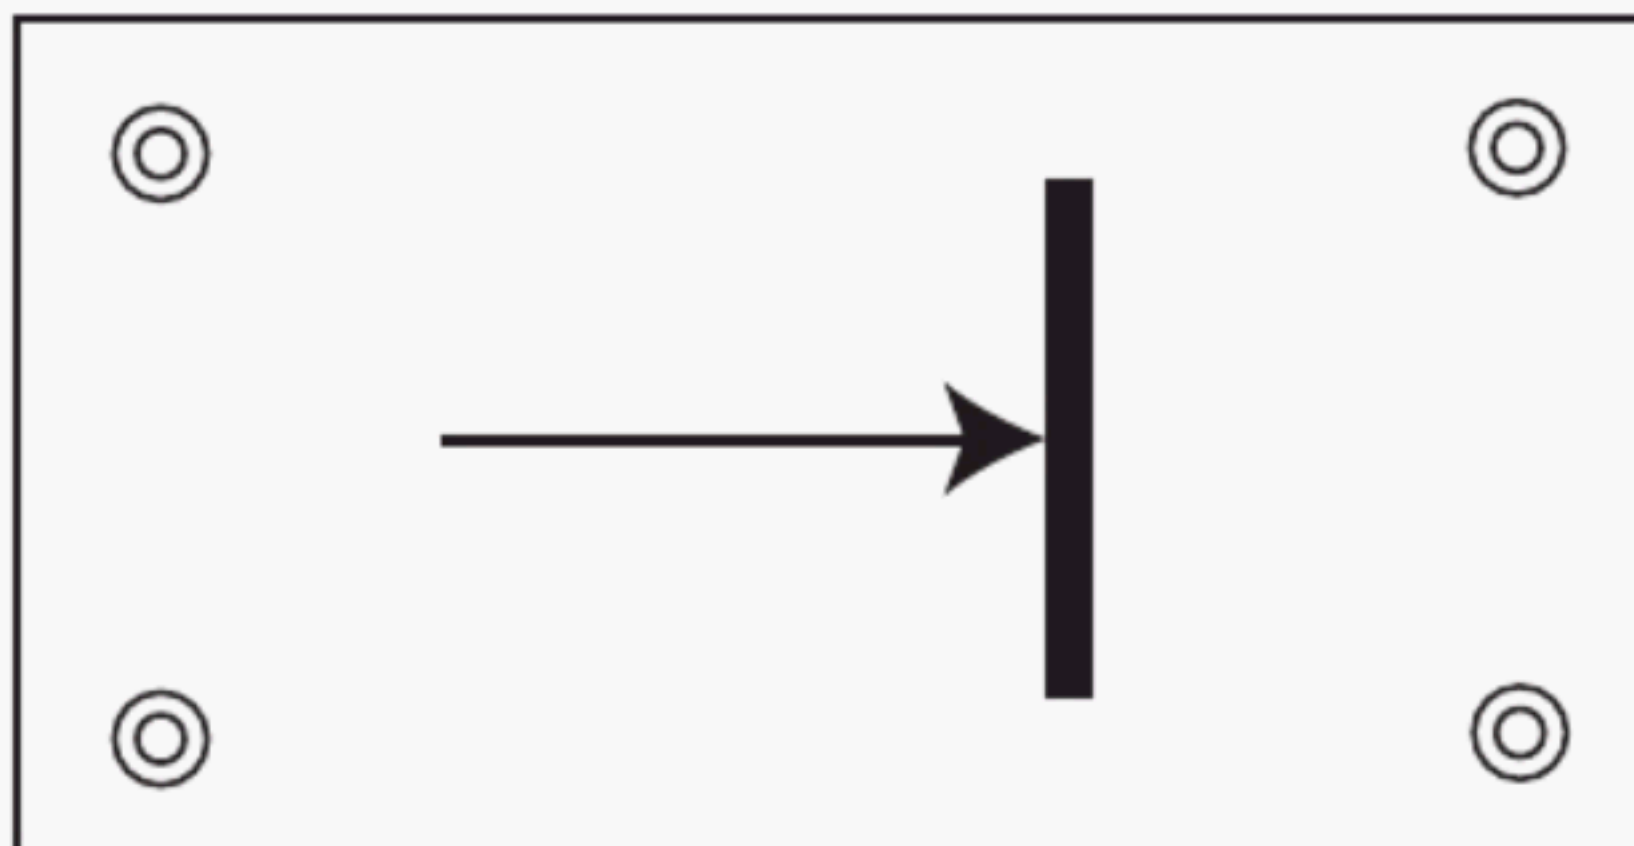


Figure 2—Typical Unidirectional Valve Identification Plate Symbol

## 9 Packaging and Shipping Requirements

**9.1** Prior to packaging or shipping, each valve shall be drained of test fluid, including draining of the body cavity area between seats and around ball, and cavities of “cored balls” if used.

**9.2** Valves manufactured with shell materials shown in ASME B16.34 Group 1 shall have lead-free rust preventative coatings on all unmachined exterior body surfaces.

**9.3** Machined or threaded surfaces that are not protected from atmospheric corrosion shall be coated with an easily removable, lead-free rust inhibitor.

**9.4** Protective end plugs of wood, wood fiber, plastic or metal shall be securely inserted into the valve end connections of socket-welding and threaded valves, or over the threaded ends in the case of external threaded ends. The protective end plugs or covers shall be of a design such that the valve cannot be installed in a pipeline with the protective plug or cover in place.

**9.5** Protective covers of wood, wood fiber, plastic or metal shall be securely attached to the valve ends of flanged and butt-welding end valves to protect the gasket surfaces and weld end preparations. The protective end covers shall be of a design such that the valve cannot be installed in a pipeline with the protective cover in place.

**9.6** At the time of shipment, ball shall be in the full open position, unless design precludes this position, such as in the case of a spring-return to closed position actuated ball valve.

**9.7** Tapped auxiliary connections shall be fitted with fully tightened solid threaded plugs, see 5.3.9 and 6.6. The thread sealant used to seal the plugs shall be suitable for the full pressure and temperature rating of the valve or as per agreement between purchaser and valve manufacturer.

**9.8** When export packaging is not specified in the purchase order, valves shall be packaged to prevent damage during shipment.

**9.9** When export packaging is specified in purchase order, valves shall be shipped in wooden boxes or crates and packed to prevent individual valves from moving within the crate or box.

## 10 Fire Testing

When a fire tested ball valve is required, or when the purchaser specifies API 607 fire-tested valves, the valve design supplied shall have successfully passed API 607, *Testing of Valves—Fire Type Testing Requirements*, current edition.

## 11 Spare Parts

When specified on the purchase order, manufacturer shall submit a complete list of recommended spare parts. This list shall include cross-sectional assembly drawings for identification of recommended spare parts and part numbers.



## Annex A (Informative)

### Information to be Specified by Purchaser

NOTE 1 If purchaser requires a metal ball valve that deviates from this standard, the deviating requirements shall be specifically stated in purchase order.

NOTE 2 If no exceptions are taken to the requirements of this standard, purchase order needs only to specify API 608 and specify items listed below.

NOTE 3 References in [brackets] are section numbers of this document

Nominal valve size [1.1]: \_\_\_\_\_

Nominal pressure Class [1.2]: \_\_\_\_\_

End connection type [1.2]: \_\_\_\_\_

Bore size category [1.3]: \_\_\_\_\_

Shell material [6.1]: \_\_\_\_\_

Trim material [6.2]: \_\_\_\_\_

Seat and seal materials [4.3 and 6.4]: \_\_\_\_\_

Operator type [5.8]: \_\_\_\_\_

ASME B16.10 long or short pattern [NPS 6 (DN 150) and larger Class 150 and 300 (PN 16, 25, 40): \_\_\_\_\_

#### OPTIONAL ITEMS THAT CAN BE SPECIFIED BY PURCHASER

Lockable device [5.8.11]: \_\_\_\_\_

Inspection by purchaser [7.1.2]: \_\_\_\_\_

Supplementary examinations [7.1.2]: \_\_\_\_\_

Bolting material [6.3]: \_\_\_\_\_

Special paint or coating: \_\_\_\_\_

Export packaging [9.9]: \_\_\_\_\_

Auxiliary connections [5.3.10]: \_\_\_\_\_


Recommended spare parts [11]: \_\_\_\_\_

Prevention of body cavity overpressure (see ASME B16.34, Section 2.3.3): \_\_\_\_\_


API 607 Fire Tested Design [10]: \_\_\_\_\_

## Annex B (informative)


### Figures

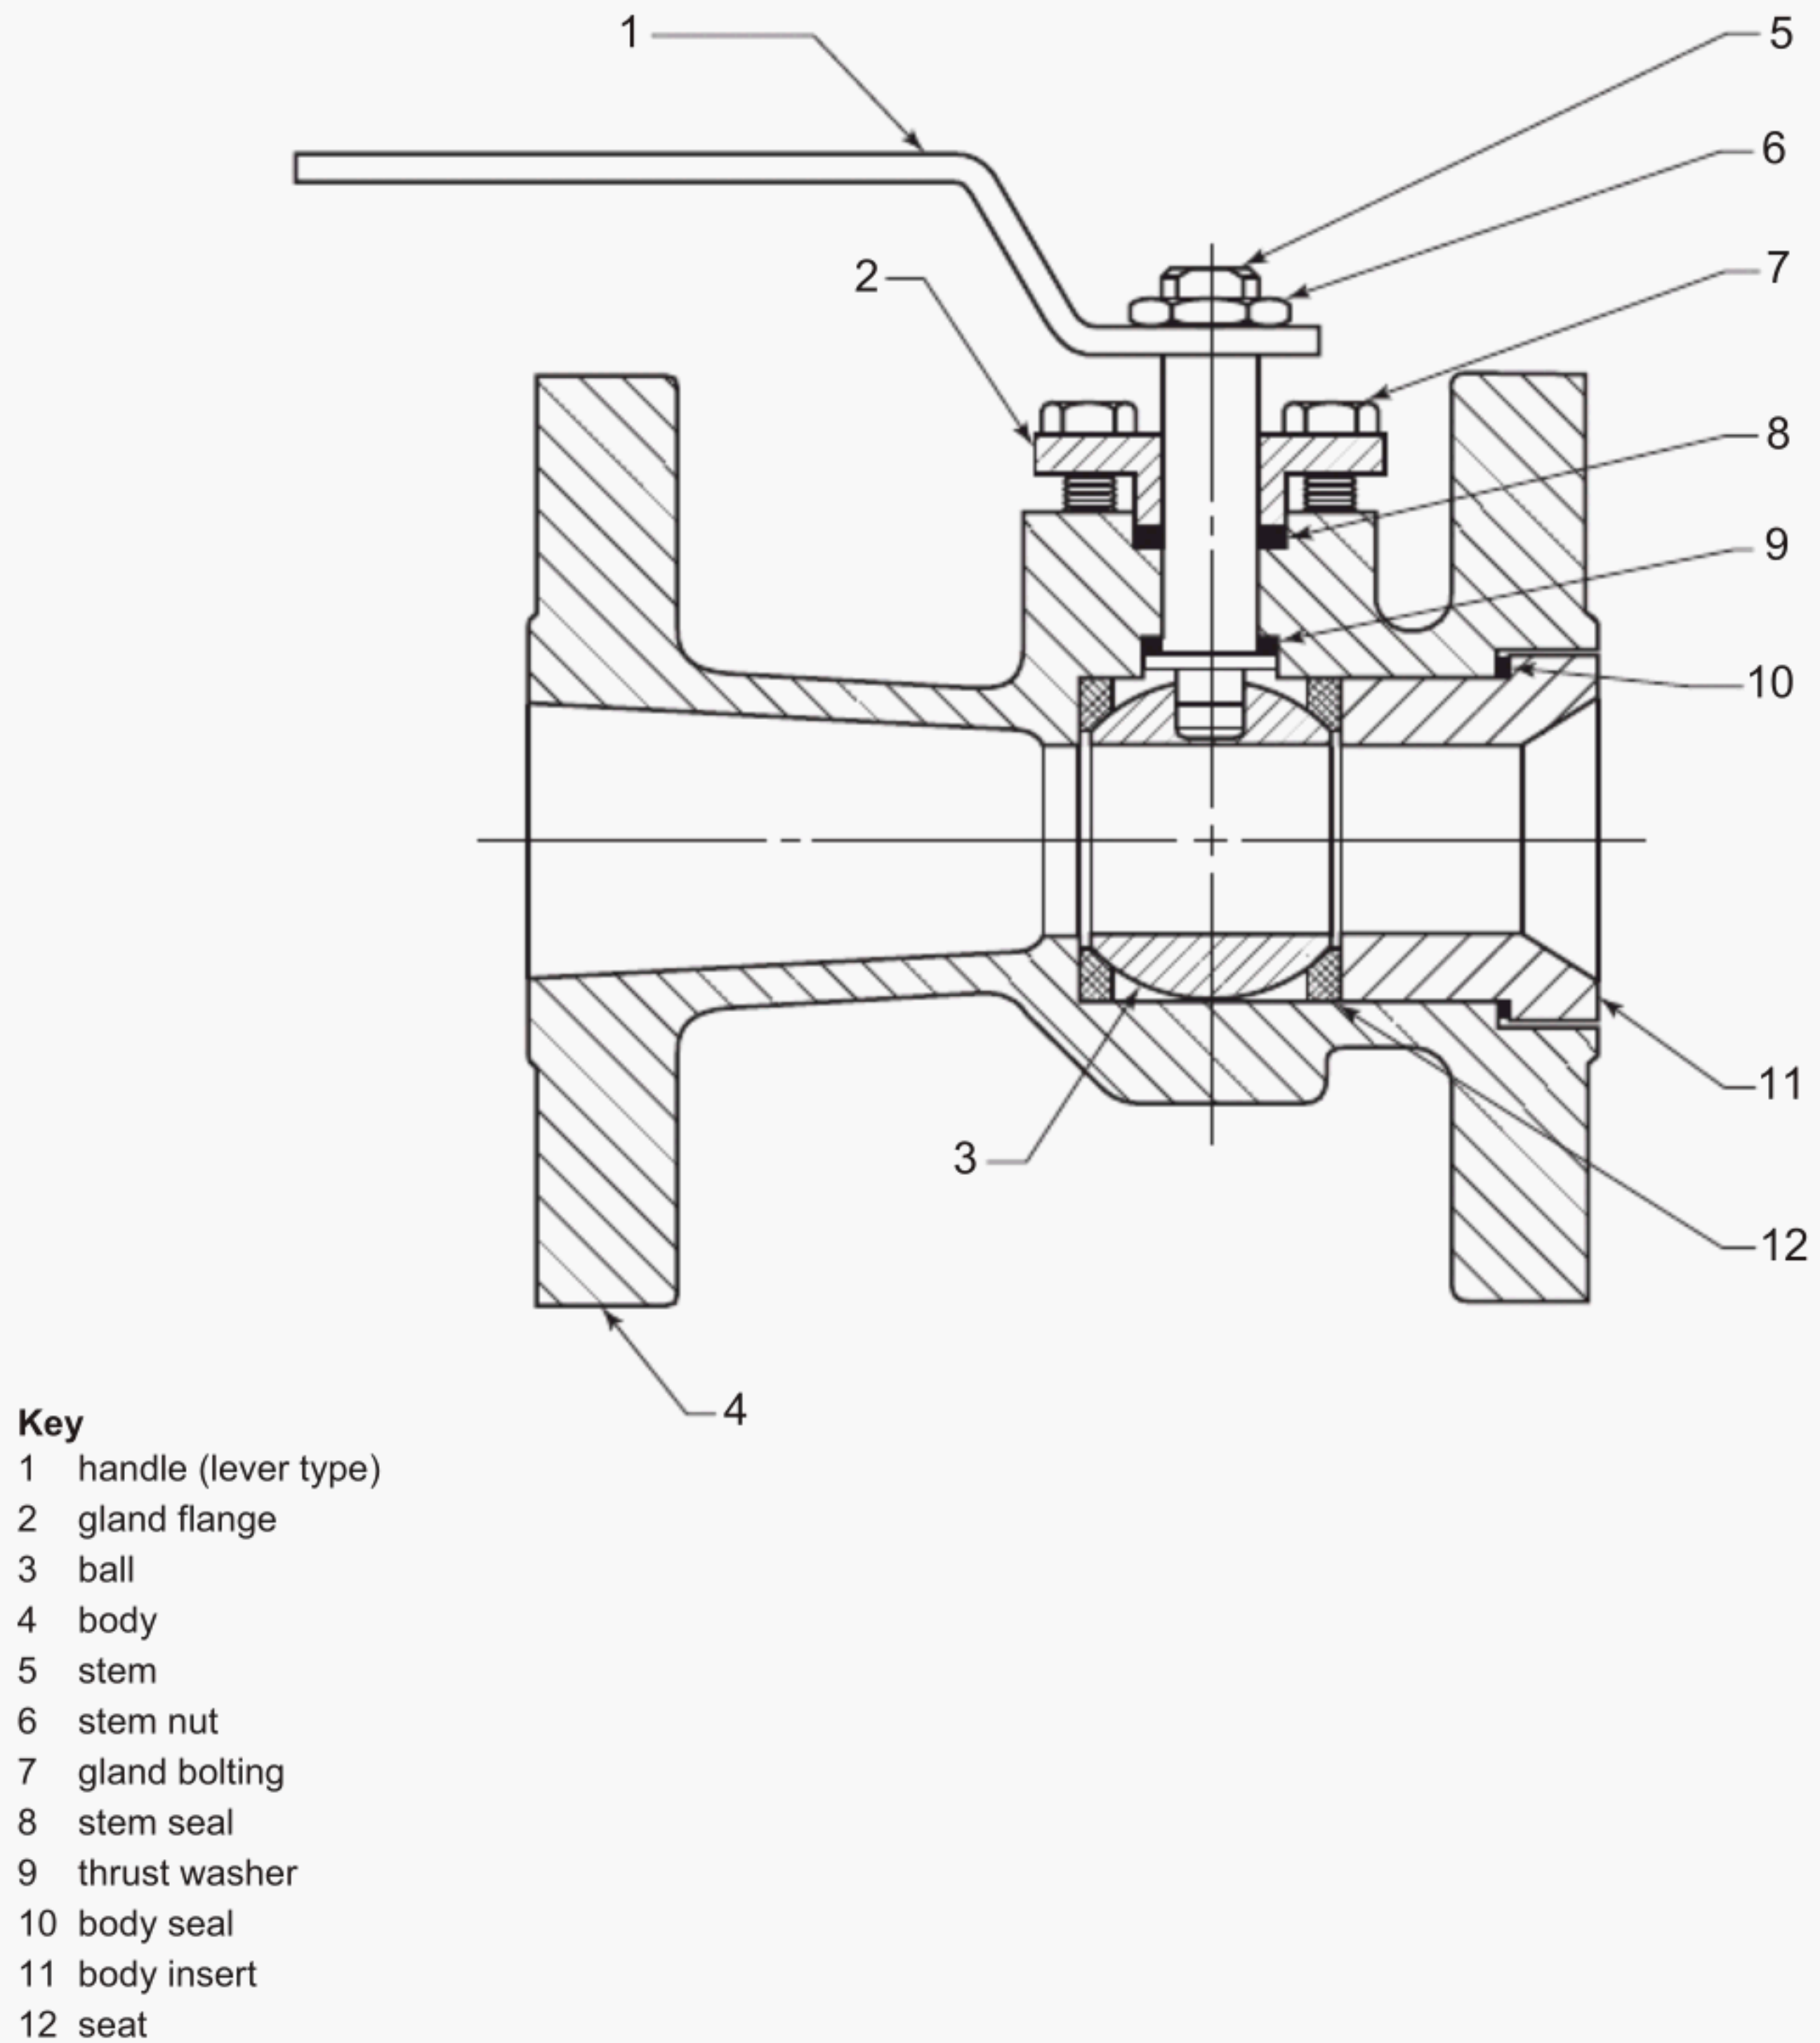

**Figure B.1—Typical Floating Ball Valve Components (One-piece Body Illustrated)—Nomenclature**

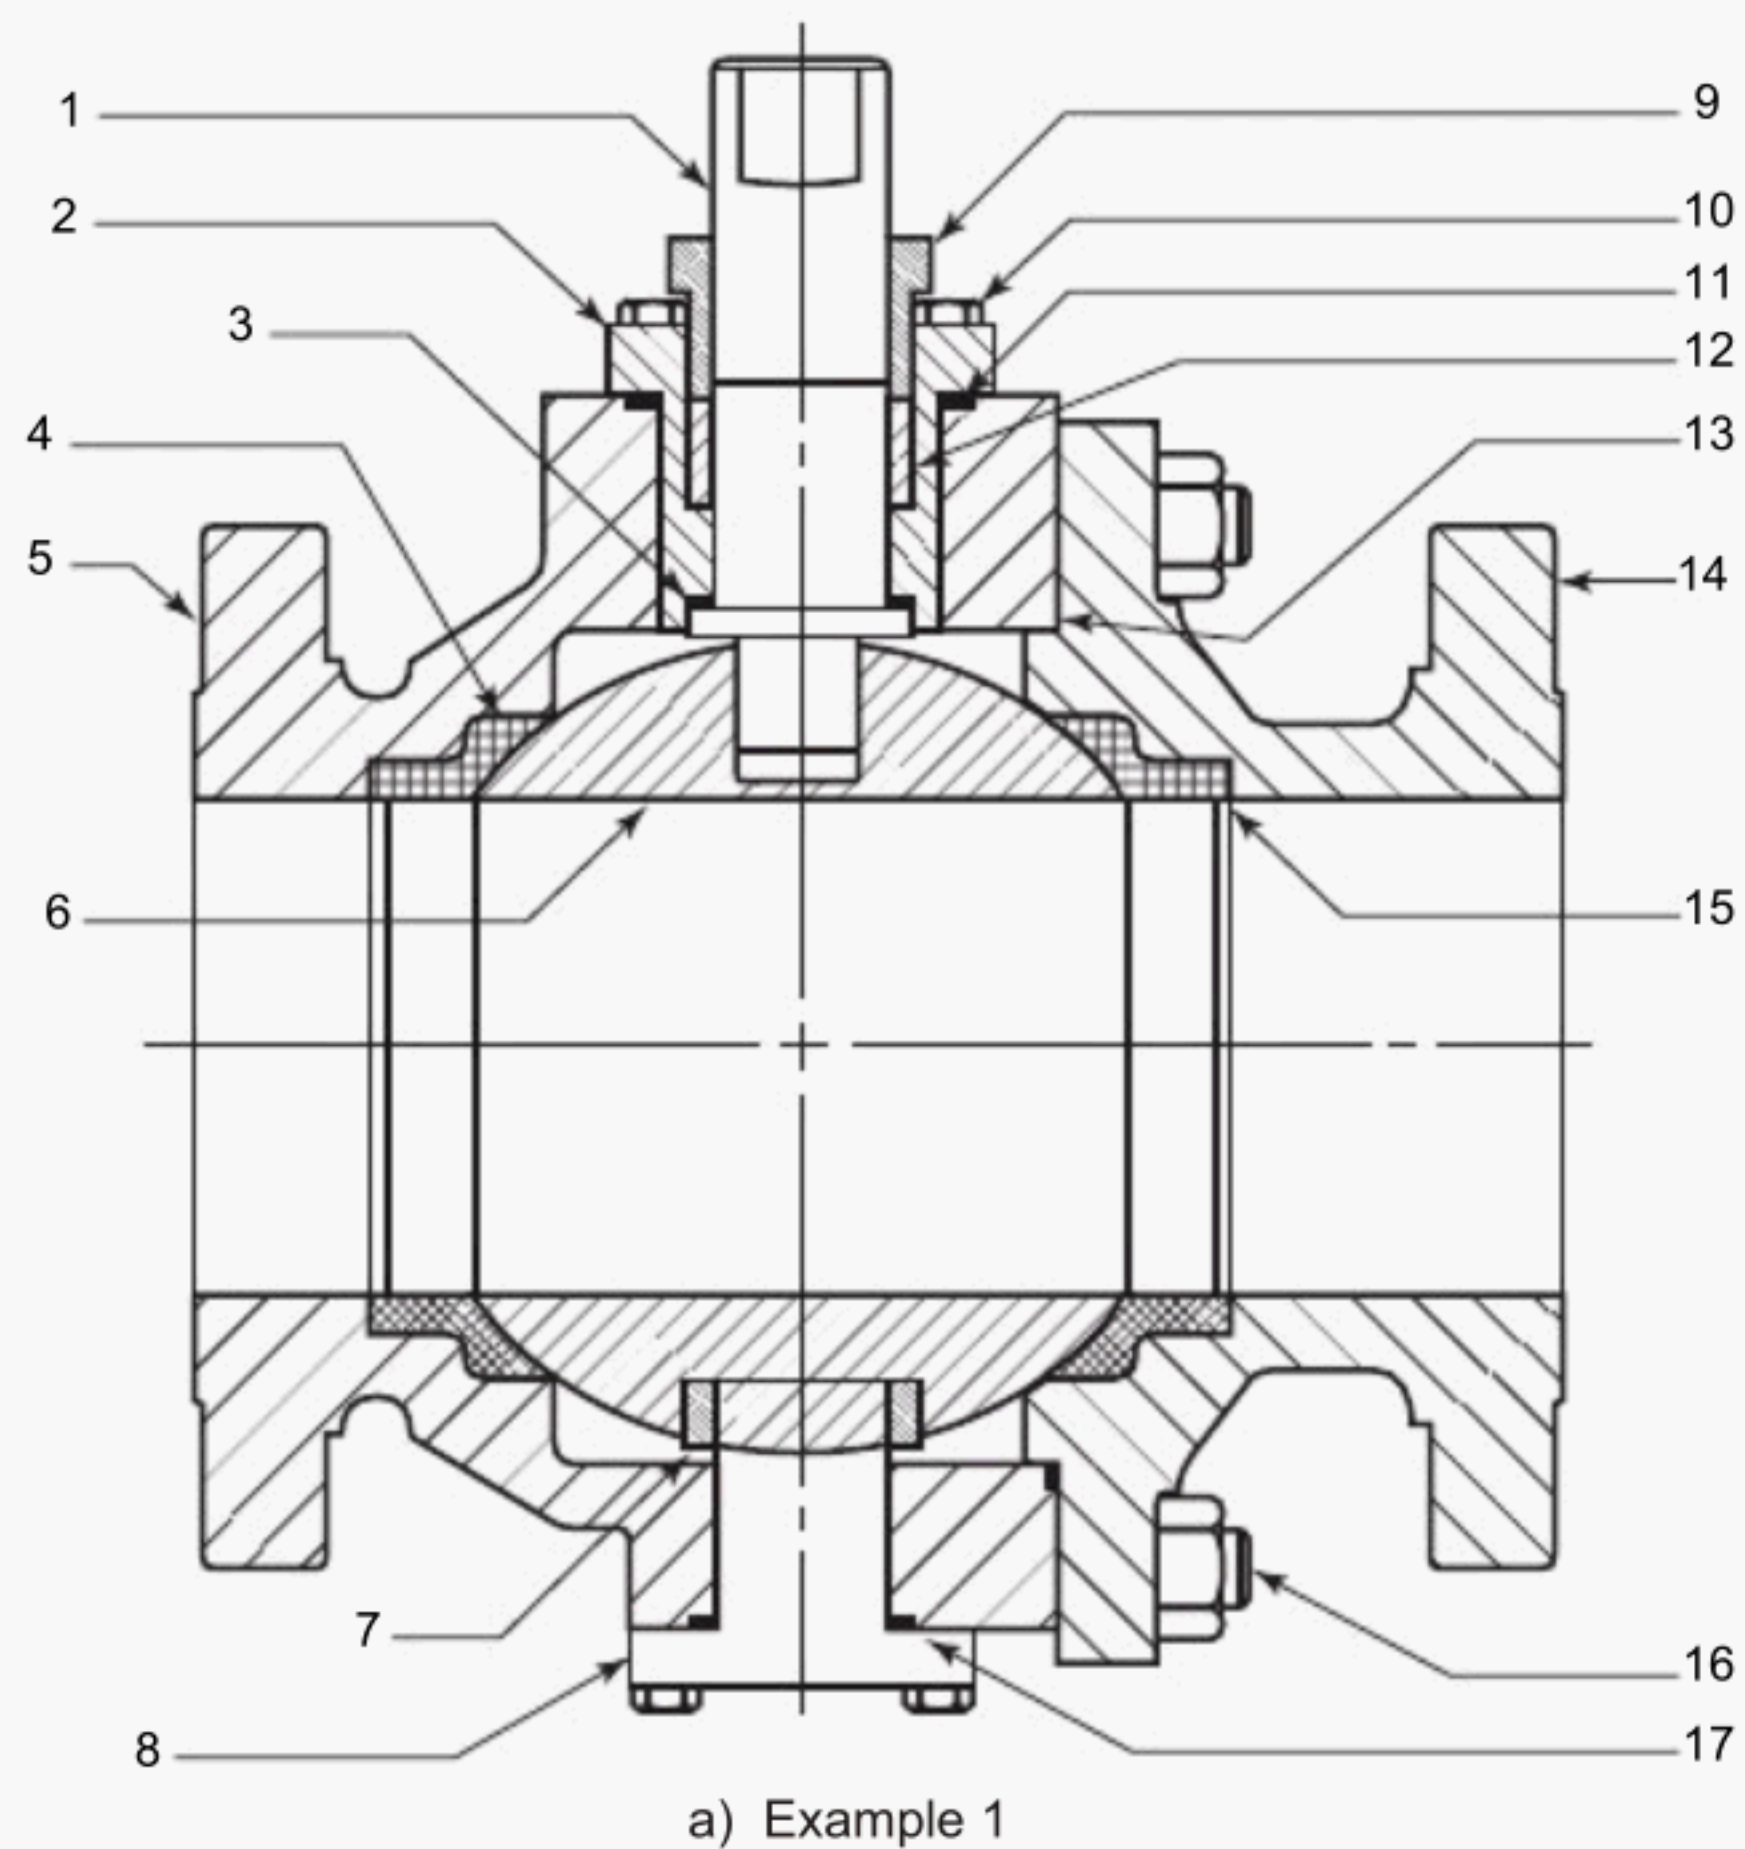**Key**

- 1 stem
- 2 cover
- 3 thrust washer
- 4 seat
- 5 body
- 6 ball
- 7 trunnion bearing
- 8 trunnion
- 9 gland
- 10 cover bolting
- 11 cover seal
- 12 stem seal
- 13 body seal
- 14 body cap
- 15 seat spring
- 16 body bolting
- 17 trunnion seal
- 18 trunnion plate
- 19 bearing spacer

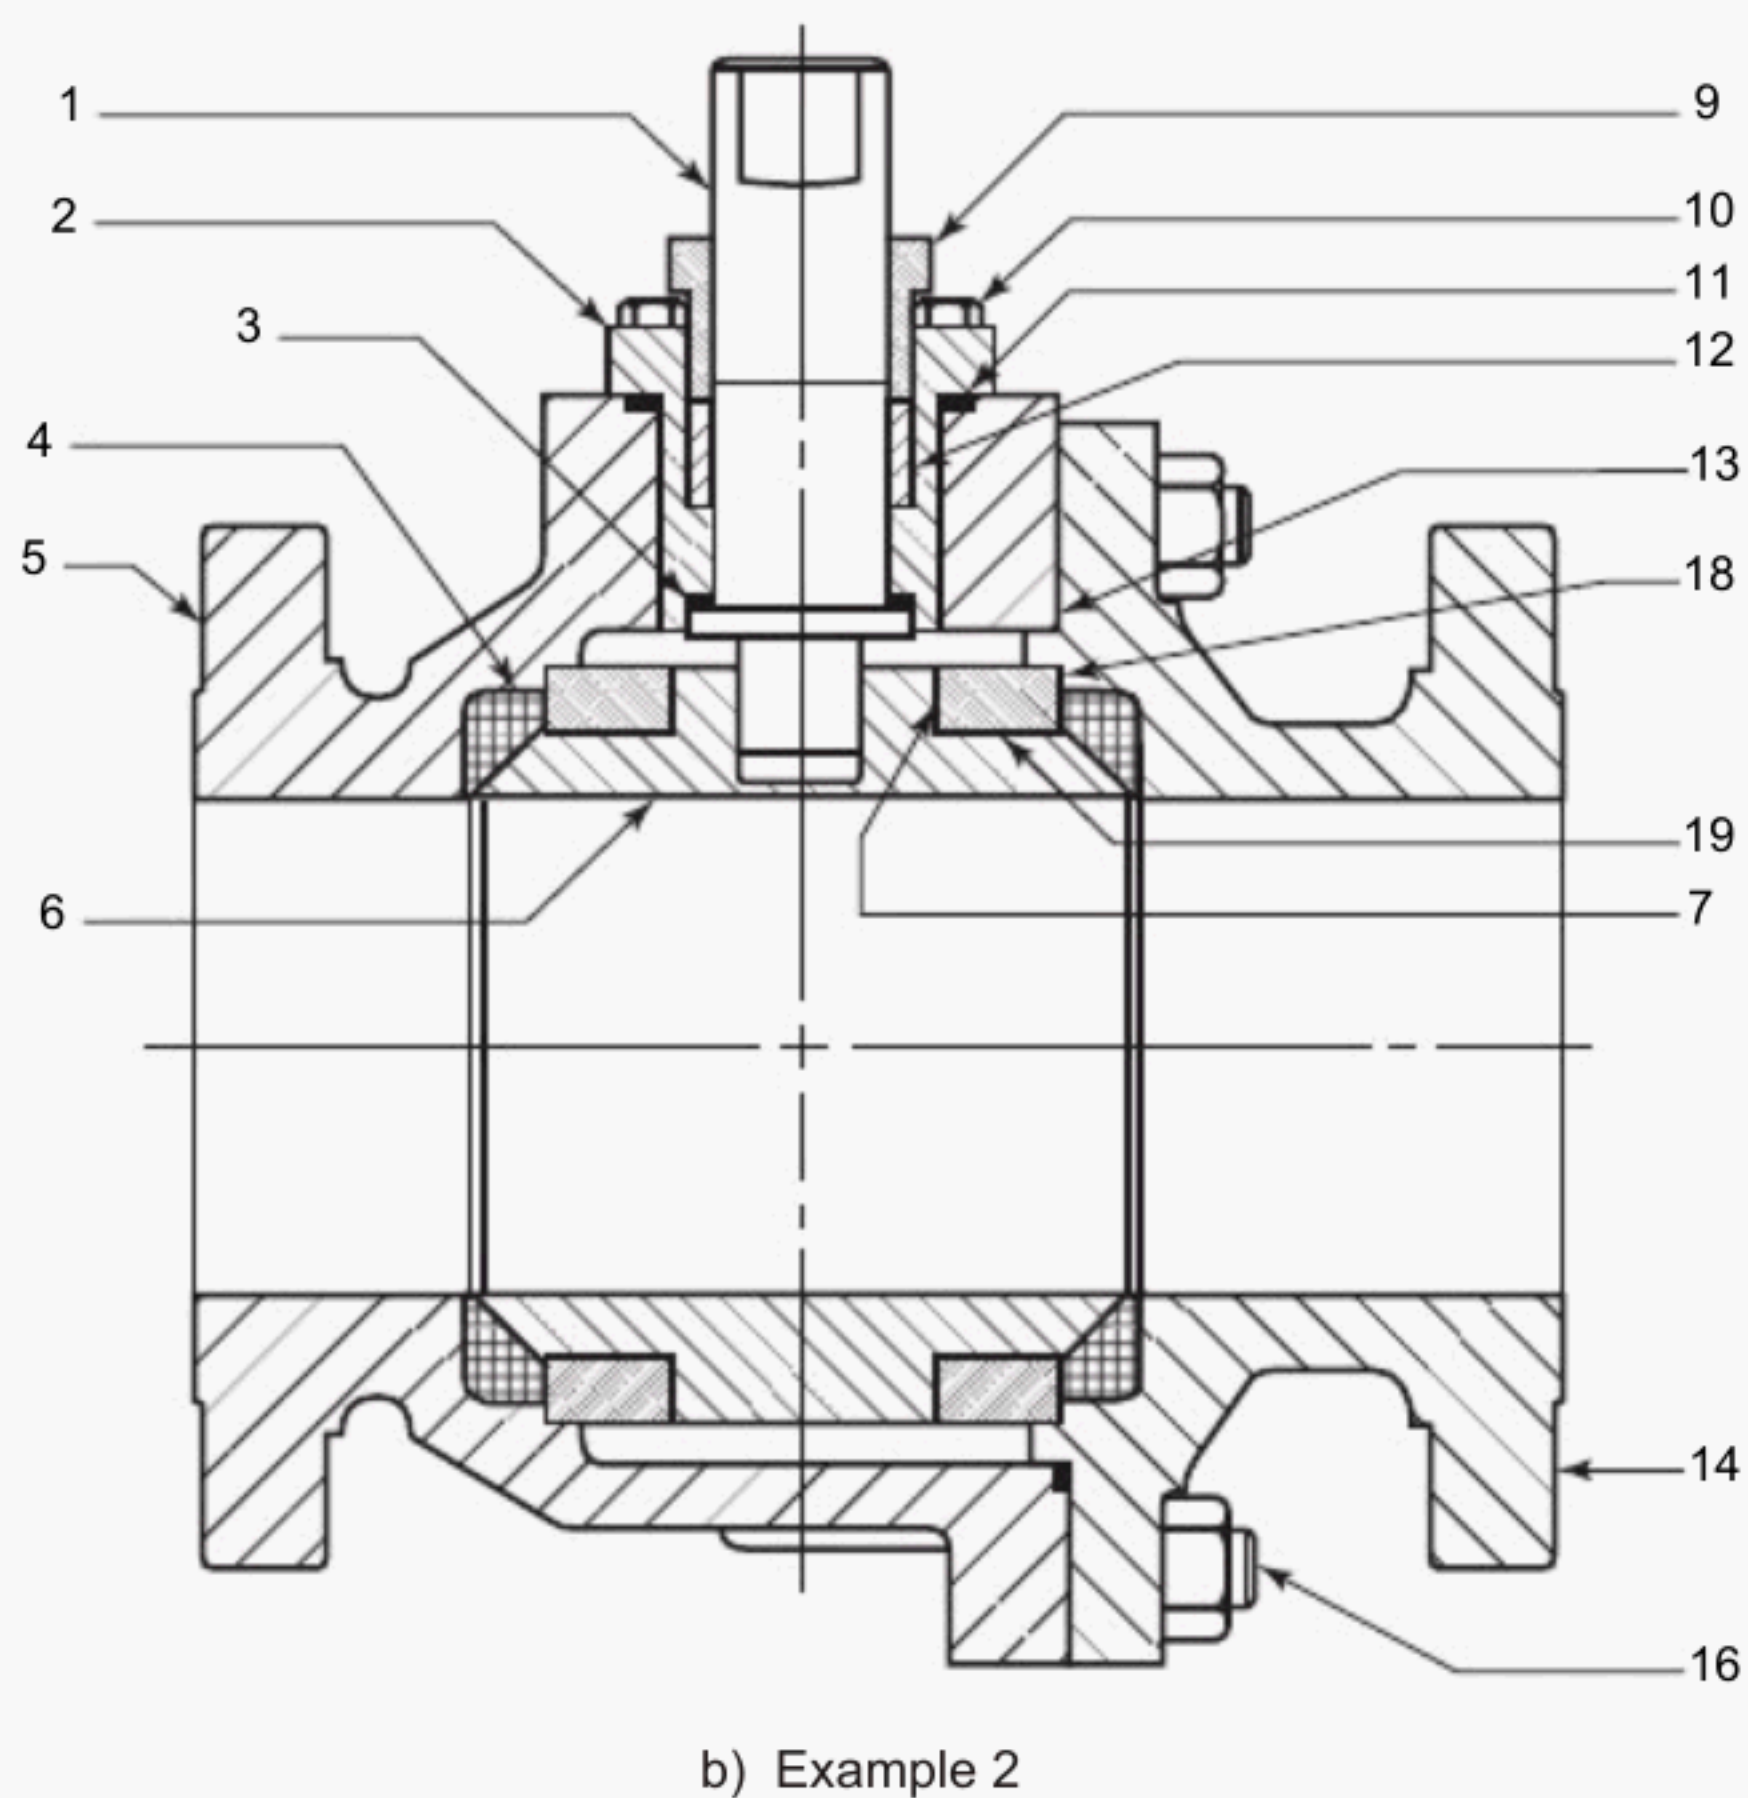

**Figure B.2—Typical Trunnion-mounted Ball Valve Components (Split-body Valve Illustrated)—Nomenclature**





# 2008 Publications Order Form

**Effective January 1, 2008.**

**API Members receive a 30% discount where applicable.**

The member discount does not apply to purchases made for the purpose of resale or for incorporation into commercial products, training courses, workshops, or other commercial enterprises.

**Available through IHS:**

Phone Orders: **1-800-854-7179** (Toll-free in the U.S. and Canada)  
**303-397-7956** (Local and International)

Fax Orders: **303-397-2740**

Online Orders: **global.ihs.com**

**Date:** \_\_\_\_\_

☐ **API Member** (Check if Yes)

**Invoice To** (☐ Check here if same as "Ship To")

Name: \_\_\_\_\_

Title: \_\_\_\_\_

Company: \_\_\_\_\_

Department: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State/Province: \_\_\_\_\_

Zip/Postal Code: \_\_\_\_\_ Country: \_\_\_\_\_

Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

**Ship To** (UPS will not deliver to a P.O. Box)

Name: \_\_\_\_\_

Title: \_\_\_\_\_

Company: \_\_\_\_\_

Department: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State/Province: \_\_\_\_\_

Zip/Postal Code: \_\_\_\_\_ Country: \_\_\_\_\_

Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Quantity	Title	SO★	Unit Price	Total
	RP 591, Process Valve Qualification Procedure		\$78.00	
	Std 598, Valve Inspection and Testing		\$73.00	
	API 600, Bolted Bonnet Steel Gate Valves for Petroleum and Natural Gas Industries		\$97.00	
	Std 602, Steel Gate, Globe and Check Valves for Sizes DN 100 and Smaller for the Petroleum and Natural Gas Industries		\$93.00	
	Std 607, Testing of Valves--Fire Type Testing Requirements		\$71.00	
	Std 609, Butterfly Valves: Double Flanged, Lug- and Wafer-type		\$73.00	

☐ Payment Enclosed ☐ P.O. No. (Enclose Copy) \_\_\_\_\_

☐ Charge My IHS Account No. \_\_\_\_\_

☐ VISA ☐ MasterCard ☐ American Express

☐ Diners Club ☐ Discover

Credit Card No.: \_\_\_\_\_

Print Name (As It Appears on Card): \_\_\_\_\_

Expiration Date: \_\_\_\_\_

Signature: \_\_\_\_\_

**Subtotal**

**Applicable Sales Tax**(see below)

**Rush Shipping Fee**(see below)

**Shipping and Handling**(see below)

**Total** (in U.S. Dollars)

★ To be placed on Standing Order for future editions of this publication, place a check mark in the SO column and sign here:

Pricing and availability subject to change without notice.

**Mail Orders** -Payment by check or money order in U.S. dollars is required except for established accounts. State and local taxes, \$10 processing fee, and 5% shipping must be added. Send mail orders to: **API Publications, IHS, 15 Inverness Way East, c/o Retail Sales, Englewood, CO 80112-5776, USA.**

**Purchase Orders** -Purchase orders are accepted from established accounts. Invoice will include actual freight cost, a \$10 processing fee, plus state and local taxes.

**Telephone Orders** -If ordering by telephone, a \$10 processing fee and actual freight costs will be added to the order.

**Sales Tax** -All U.S. purchases must include applicable state and local sales tax. Customers claiming tax-exempt status must provide IHS with a copy of their exemption certificate.

**Shipping (U.S. Orders)** -Orders shipped within the U.S. are sent via traceable means. Most orders are shipped the same day. Subscription updates are sent by First-Class Mail. Other options, including next-day service, air service, and fax transmission are available at additional cost. Call 1-800-854-7179 for more information.

**Shipping (International Orders)** -Standard international shipping is by air express courier service. Subscription updates are sent by World Mail. Normal delivery is 3-4 days from shipping date.

**Rush Shipping Fee** -Next Day Delivery orders charge is \$20 in addition to the carrier charges. Next Day Delivery orders must be placed by 2:00 p.m. MST to ensure overnight delivery.

**Returns** -All returns must be pre-approved by calling the IHS Customer Service Department at 1-800-624-3974 for information and assistance. There may be a 15% restocking fee. Special order items, electronic documents, and age-dated materials are non-returnable.



# THERE'S MORE WHERE THIS CAME FROM.

API provides additional resources and programs to the oil and natural gas industry which are based on API Standards. For more information, contact:

## **API MONOGRAM® LICENSING PROGRAM**

Phone: 202-962-4791  
Fax: 202-682-8070  
Email: [certification@api.org](mailto:certification@api.org)

## **API QUALITY REGISTRAR (APIQR®)**

- > ISO 9001 Registration
- > ISO/TS 29001 Registration
- > ISO 14001 Registration
- > API Spec Q1® Registration

Phone: 202-962-4791  
Fax: 202-682-8070  
Email: [certification@api.org](mailto:certification@api.org)

## **API PERFORATOR DESIGN REGISTRATION PROGRAM**

Phone: 202-682-8490  
Fax: 202-682-8070  
Email: [perfdesign@api.org](mailto:perfdesign@api.org)

## **API TRAINING PROVIDER CERTIFICATION PROGRAM (API TPCP™)**

Phone: 202-682-8490  
Fax: 202-682-8070  
Email: [tpcp@api.org](mailto:tpcp@api.org)

## **API INDIVIDUAL CERTIFICATION PROGRAMS (ICP®)**

Phone: 202-682-8064  
Fax: 202-682-8348  
Email: [icp@api.org](mailto:icp@api.org)

## **API ENGINE OIL LICENSING AND CERTIFICATION SYSTEM (EOLCS)**

Phone: 202-682-8516  
Fax: 202-962-4739  
Email: [eolcs@api.org](mailto:eolcs@api.org)

## **API PETROTEAM (TRAINING, EDUCATION AND MEETINGS)**

Phone: 202-682-8195  
Fax: 202-682-8222  
Email: [petroteam@api.org](mailto:petroteam@api.org)

## **API UNIVERSITY™**

Phone: 202-682-8195  
Fax: 202-682-8222  
Email: [training@api.org](mailto:training@api.org)

Check out the API Publications, Programs, and Services Catalog online at [www.api.org](http://www.api.org).



Copyright 2008 - API, all rights reserved. API, API monogram, APIQR, API Spec Q1, API TPCP, ICP, API University and the API logo are either trademarks or registered trademarks of API in the United States and/or other countries.





1220 L Street, NW  
Washington, DC 20005-4070  
USA

202.682.8000

Additional copies are available through IHS

Phone Orders: 1-800-854-7179 (Toll-free in the U.S. and Canada)  
303-397-7956 (Local and International)

Fax Orders: 303-397-2740

Online Orders: [global.ihs.com](http://global.ihs.com)

Information about API Publications, Programs and Services  
is available on the web at [www.api.org](http://www.api.org)

Product No. C60804